

LPW-28BLK (angular stitch)


Two needle, High speed, Post bed, Large vertical axis hook, Compound feed and walking foot, reverse stitch, Disengageable needle bars, Lockstitch machine



LPW-28BLK

Variety

LPW-28BLK

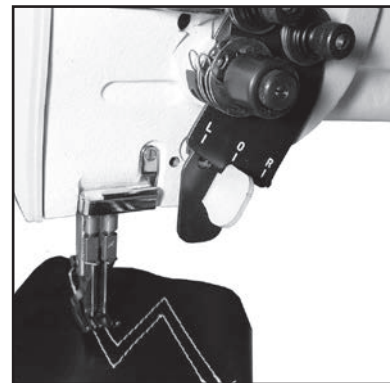

Angular stitching and/or straight stitching can be made by simplified operation

Applications

- For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials.
- Suitable for sewing operations which require decorative or functional angular stitching such as collars, pockets, shoe uppers, automobile upholstery, etc.



LPW-28BLK (angular stitch)

Features

- Post bed and wide working space makes it easy for sewing of large materials.
- Easy operation of disengageable right and left needle bars by use of finger touch lever.
- Compound feed and alternating pressers mechanism assures even feeding of materials.
- Semi-automatic lubrication system.
- Large vertical axis hook.
- Safety clutch prevents the hook from being damaged.
- Reverse stitching.
- Various gauge sets available.

Specifications

| Variety | LPW-28BLK | |
|---------------------------------|---|-----------------|
| Number of needle | Two needle | |
| Max. sewing speed | 2,200 s.p.m. | |
| Max. stitch length | 7/32" (5.5 mm) | |
| Clearance under presser foot | by knee | 35/64" (14 mm) |
| | by hand | 21/64" (8.5 mm) |
| Needle bar stroke | 1-9/32" (32.6 mm) | |
| Needle(standard) | DPx17 (#24) , 135x17 (#180) | |
| Thread | #5 (standard) | |
| Hook | Large vertical axis hook | |
| Amount of lift of walking foot | 3/32"-3/16" standard 1/8" (2.5 - 5 mm) (standard 3.2 mm) | |
| Thread take up lever | Slide type | |
| Lubrication | Semi-automatic lubrication type | |
| Bed size | 20-25/64"x 7" (518 x 177 mm) | |
| Post height | 7" (178mm) | |
| Working space | 10-5/32"x11-11/32" (258 x 288 mm) | |
| Motor | Clutch motor | |
| Net weight(Head only) | 44Kg | |

NOTE: (1) Speed depends on threads, materials and type of operation
(2) Specifications subject to change without notice

Needle gauge list

| Variety | Needle gauge size | |
|-----------|--|----------------------|
| LPW-28BLK | 1/4"(6.4mm), 5/16"(7.9mm), 3/8"(9.5mm) | standard 3/8"(9.5mm) |

Note: Other needle gauges are available within 3/16" to 3/4" at extra cost.



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

Printed in Japan 2015.08

<http://www.seiko-sewing.co.jp/>